


SYMBOL CARD

Environmentally-friendly E.C.F. boards, certify FSC®. Double blade coated on one side with a Satin finish. Available in Premium White shade.

DESCRIPTION

| SIZE   | GRAIN | SUBSTANCE                   |
|--------|-------|-----------------------------|
| 72X102 | LG    | 210 240 270 300 330 360 400 |

RANGE

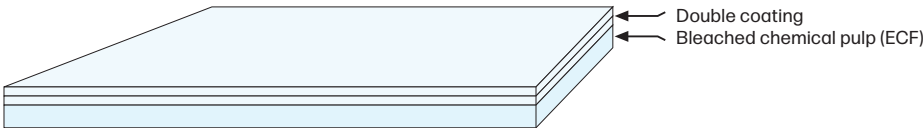

| SUBSTANCE | THICKNESS | ROUGHNESS* | TABER STIFFNESS 15° |             |
|-----------|-----------|------------|---------------------|-------------|
| ISO 536   | ISO 534   | ISO 8791-2 | ISO 2493            |             |
| g/m²      | µm        | ml/min     | mN                  |             |
|           |           |            | long ± 15%          | cross ± 15% |
|           |           |            |                     |             |
| 210 ± 4%  | 250 ± 10  | 350 ± 50   | 85                  | 50          |
| 240 ± 5%  | 285 ± 10  | 350 ± 50   | 110                 | 70          |
| 270 ± 5%  | 325 ± 10  | 350 ± 50   | 160                 | 100         |
| 300 ± 5%  | 360 ± 10  | 350 ± 50   | 200                 | 125         |
| 330 ± 5%  | 400 ± 15  | 350 ± 50   | 250                 | 160         |
| 360 ± 5%  | 437 ± 15  | 350 ± 50   | 290                 | 190         |
| 400 ± 5%  | 480 ± 20  | 350 ± 50   | 365                 | 230         |

TECHNICAL  
FEATURES

ref. standard/instrument  
unit of measure

Brightness - ISO 2470  
(R457) - 104% ± 2  
Relative Humidity 50% ± 5  
ref. TAPPI 502-98  
\* Uncoated side



ECOLOGICAL  
FEATURES

The product is completely recyclable. Special runs available upon request.

NOTES

# SYMBOL CARD

Symbol Card is excellent for covers, postcards, brochures, promotional material, greeting cards and similar applications.

## APPLICATIONS

Can be used without problems with the main printing systems: letterpress, offset, blind embossing, hot foil stamping, thermography and screen-printing. For offset printing, the characteristics of the coated side are comparable to our Symbol Freelifa Satin, and the uncoated side is designed to provide good printability, also with solid colours.

## PRINTING SUGGESTIONS

Good results can be expected with all the main converting process: cutting, die-cutting, scoring, glueing, varnishing and plastic lamination.

## CONVERTING SUGGESTIONS

